
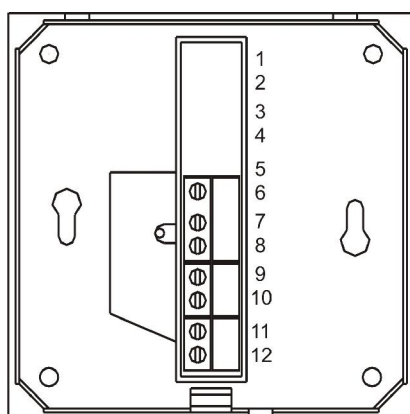


## Function Description for FTW04LCD\_2V

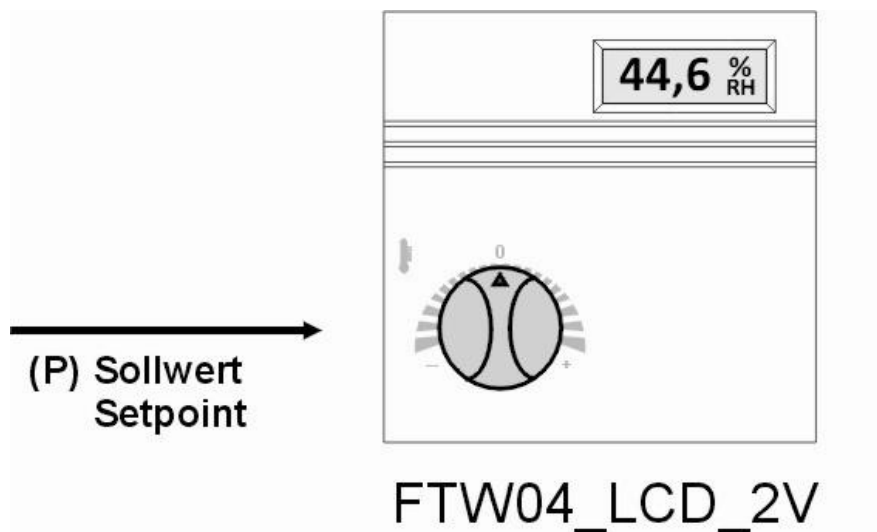

- 6 – OUT Temperatur 0-10V/ *OUT Humidity 0-10V*
- 7 – OUT Sollwert 0-10V / *OUT Set point 0-10V*
- 8 – GND
- 11 – GND
- 12 – 24VAC/DC

## 1 Overview

The FTW04LCD\_2V is designed for connecting the room humidity and humidity set point to a superior controller.

### 1.1 Display

The following display options can be activated:

Display room humidity	ON/OFF
Display humidity set point	ON/OFF
Unit humidity display	with rH/ without rH
Change-over interval of display	0-65535s

## **1.2 Set Point Adjustment**

The setpoint can be adjusted between 0 and 100%.

## **2 Output 0-10V**

Humidity: 0...+50°C / 0...10V=, max 10 mA, (clamps 6-8)

Set point: 0...+50°C (adjustable range, configurable) / 0...10V=, max 10 mA, (clamps 7-8)

## **3 Order Information**

For a smooth order processing we would like to ask you to include the following information in your order:

- Requested presentation of display
- Change-over interval of display
- Set point range